

Hybrid Speed Dome Camera(TVI&AHD) 30x Zoom, WDR,1080P

DHC-20SETA


Picture



Feature

- 1/2.8" Sony PS-CMOS
- 2 Megapixel Hybrid(TVI & AHD) Speed Dome Camera
- Optical 30x Zoom (4.3~129mm), Auto Focus, Day & Night with ICR
- Min. 0.00001Lux with DSS(60x), 3DNR
- Motion Detection, Privacy Masking (8), Digital Zoom (20x), True WDR
- Preset (250), Group (12), Tour, Trace
- Time Schedule, Defog, User Password, UTC
- Dehumidification, DIS (Digital Image Stabilizer), Alarm (4/1)
- Built-in Fan/ Heater, Weather Proof (IP66), Fan/Heater

Dimensions

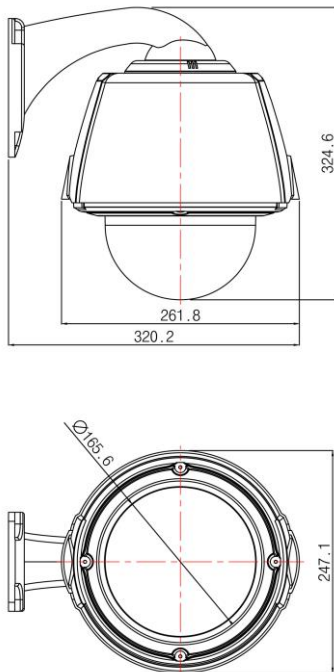

Unit: mm

Specifications

MODEL	DHC-20SETA
Video	
Image Sensor	1/2.8" 2Mega Sony CMOS
Scan mode	Progressive Scan
Total number of pixels	1952(H) x 1236(V), 2M Pixels
Number of active pixels	1944(H) x 1224(V), 2M Pixels
Resolution	1080p
Minimum illumination	Color: 0.3 lux @ F1.6 (AGC 30) B/W:0.00001@ F1.6 (AGC 30, Sens-up x32)
Video Output	Main: TVI/AHD Selectable, Sub: CVBS
S/N Ratio	50dB
Lens	
Lens	4.3~129mm(F1.6~F5.0) Optical(30x), Digital Zoom(20x), Total Zoom (600x)
Focus mode	Auto / Manual / Oneshot
Angle of view	H:65.1°(Wide)~2.34°(Tele)
Pan/ Tilt	
Pan/Tilt angle	360° Endless / 92°
Pan Speed	0.1° ~ 240°/sec (64 Levels), Preset: 360°/sec
Preset Accuracy	±0.1°
Preset point	250 Presets
Alarm in/out	4 Inputs / 1 Relay Output
Function	
Day & Night	Day / Auto / Night
Back Light	HLC / BLC / WDR
White Balance	AUTO / Indoor/ Outdoor
AGC	Low/Middle/Max/Off
DNR	Low/Middle/Max/Off
Defog	Off/Auto/Manual
Privacy / Motion	8 Zones / 1 Zones
Brightness	Level Setting
Color Level	Level Setting
Stibilize	On/Off
UTC	Available
Time Schedule	Available
Dehumidification	Available
Environment	
Operating Humidity	30 % ~ 90 % RH
Operating Temp.	- 40°C to 50°
Electrical	
Power Consumption	Max 22W
Power Supply	AC24V, 50/60Hz
Mechanical	
Construction	Aluminum body , Clear vandal bubble (PC)
Dimension	261.8(W)X324.6(H)mm
Weight	About 5Kg (Camera Only)