


INDOOR ACRYLIC MIRROR - 26 INCHES

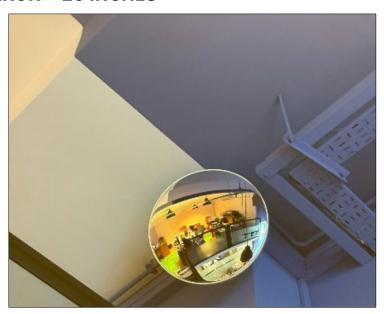


SPECIFICATIONS

MIRROR LENS : 3.0MM PMMA (ACRYLIC) / 130° ACTUAL WIDE ANGLE

MIRROR BACK : 4.0MM PVC, WHITE CHEVRON SHEET, MOISTURE-RESISTANT / U-SHAPED

ALUMINIUM EDGE

ACCESSORIES : CHROME BRACKET AND HOLDER WITH US FLAT STEEL

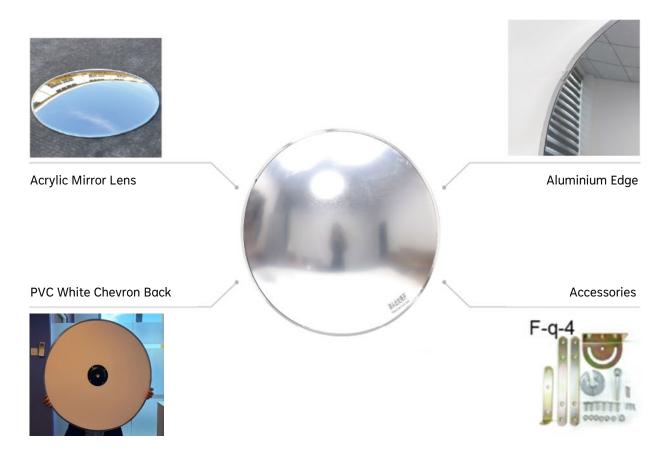



PRODUCT INSTALLATION




Note: The mirror surface is protected by a layer of film which can be removed when you have finished installing the mirror.

wall


Step 2:

Drill a properly positioned hole on the wall or roof for installation and connect the wall part to the wall or roof with an M8 Dilatant Bolt, then adjust the position and fasten them.



Step 3:

Connect the ball part fixed into the mirror back to the L part with washer and M8 Nut. Then connect the extended part to L part and wall part with Carriage Bolts, adjust the angle and position, then screw them in. You can use the extended part or not according to different use environments.



Installation Steps

flexibility of ball part.


Fix the ball part and the cover to

back of mirror with M6 Bolts. Then


tighten the bolts according to the

Step 1:









Caution: When cleaning the mirror, carefully use a soft cloth dampened with water, then dry it with cotton or soft tissue. Do not use any escharotic on the mirror surface.

CONTACT US NOW

Tel: +65 6777 2828

WhatsApp: +65 8943 5150

Website: http://www.astrolsecurity.net

Email: hello@astrolsecurity.net

Address: 18 Boon Lay Way #03-98/99 TradeHub 21 Singapore 609966